

## 260MRT SCISSOR LIFTS

### Platform

- 1.65 m x 2.59 m steel platform (deck extension retracted)
- 1.22 m manual front deck extension
- Fold down handrails
- Self-closing gate
- Lanyard attach points
- Proportional drive control with thumb steer
- Proportional lift/lower speed control
- Joystick enable for lift and drive
- Moveable and removable platform console box
- Load sensing system

### Power & Transmission

- Kubota D1005 (17.5 kW) diesel engine
- Programmable “Personality” settings
- On-board self-diagnostic testing
- Engine distress warning/shut down system <sup>1</sup>
- Hydrostatic drive with anti stall function
- Two speed drive selection
- Four wheel drive

### Functional Equipment & Accessories

- 3 degree tilt alarm and indicator light
- Steel scissor guards
- 26 x 12 foam filled loader lug tread tyres
- Lifting/tie down lugs
- Hour meter
- Ground control selector switch with key lock
- Lubrication free scissor arm bushings
- Scissor maintenance prop
- Horn
- AC power cable to platform

### Available Options

- Hydraulic levelling jacks
- Descent alarm
- All motion alarm
- 13 mm air line to platform
- Platform work lights <sup>2</sup>
- Flashing amber beacon
- Plugs & Sockets
- Cylinder bellows






<sup>1</sup> Low oil pressure and high coolant temperature alarms with shut-down enabled/disabled by analyser.

<sup>2</sup> Includes four 40W platform mounted halogen floodlights

## 260MRT SCISSOR LIFTS

A. Platform Height – Elevated	7.92 m
B. Platform Height – Lowered	1.26 m
C. Platform Railing Height	1.10 m
D. Stowed Height (Rails Folded)	1.47 m
E. Platform Size	1.65 m x 2.59 m
F. Deck Extension	1.22 m
G. Overall Width	1.75 m
H. Overall Length <sup>1</sup>	2.67 m
I. Wheelbase	1.98 m
J. Ground Clearance	0.20 m
Platform Capacity	570 kg
Capacity on Deck Extension	140 kg
Lift/Lower Time	37/24 sec.
Maximum Drive Height	7.92 m
Machine weight <sup>2</sup>	3,390 kg
Maximum Ground Bearing Pressure	8.30 kg/cm <sup>2</sup>
Drive Speed – Lowered	5.6 km/h
Drive Speed – Elevated	0.8 km/h
Gradeability	35%
Turning Radius – Inside	2.13 m
Turning Radius – Outside	4.39 m
Tyres	26 x 12 Lug Tread
Brakes	Spring Applied Hydraulic
Power Source	Kubota D1005 17.5 kW
Fuel Tank Capacity	27 L
Hydraulic System	68 L

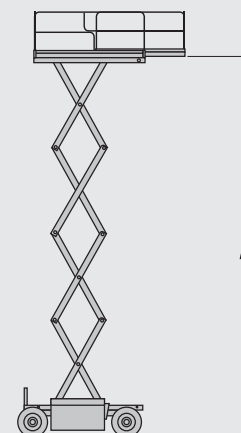

**JLG Industries, Inc. is a leading designer and manufacturer of access equipment and complementary services and attachments.**

JLG has manufacturing facilities in the United States, France, Romania, China and Belgium. Customers throughout Europe, Scandinavia, Africa and the Middle East benefit from a network of dedicated sales and service operations designed to deliver the highest levels of support.

**JLG is an Oshkosh Corporation company.**

**[www.jlgeurope.com](http://www.jlgeurope.com)**

<sup>1</sup> Dimensions with optional levelling jacks are; Length 3.37 m, Width 1.79 m, Weight +360 kg.

<sup>2</sup> Certain options or country standards may increase weight and/or dimensions.