

nifty

120

**TRAILER MOUNTED
ACCESS PLATFORM**



12.33m (40ft 5in)

Working height

5m (16ft 5in)

Working outreach

**Fully Proportional
Hydraulic Controls**

Simple, reliable &
easy to maintain

Bi-Energy Available

Optimising utilisation

Weight Saving Design

Easily towed &
manoeuvred on site

**Hydraulic Outriggers
Available**

For quick & easy setup

Telescopic Axles

Access through double
doorway openings



niftylift.com



nifty 120

The **Nifty 120** is one of the most robust and versatile trailer mounts available. Its telescopic axles allow it to pass through double doorway openings and setting up is simple with a choice of manual or hydraulic outriggers. Operation is quick and easy and its reliable hydraulic controls make it an ideal alternative to ladders and scaffolds.

SAFETY FEATURES

- Pressure sensitive outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked




Retractable axles allow the **120** to pass through a 1.10m (3ft 7in) wide opening.

The **120's** manual outriggers are both cost effective and simple to set up.



To save time and energy when setting up, the **120** is also available with a hydraulic outriggers option.

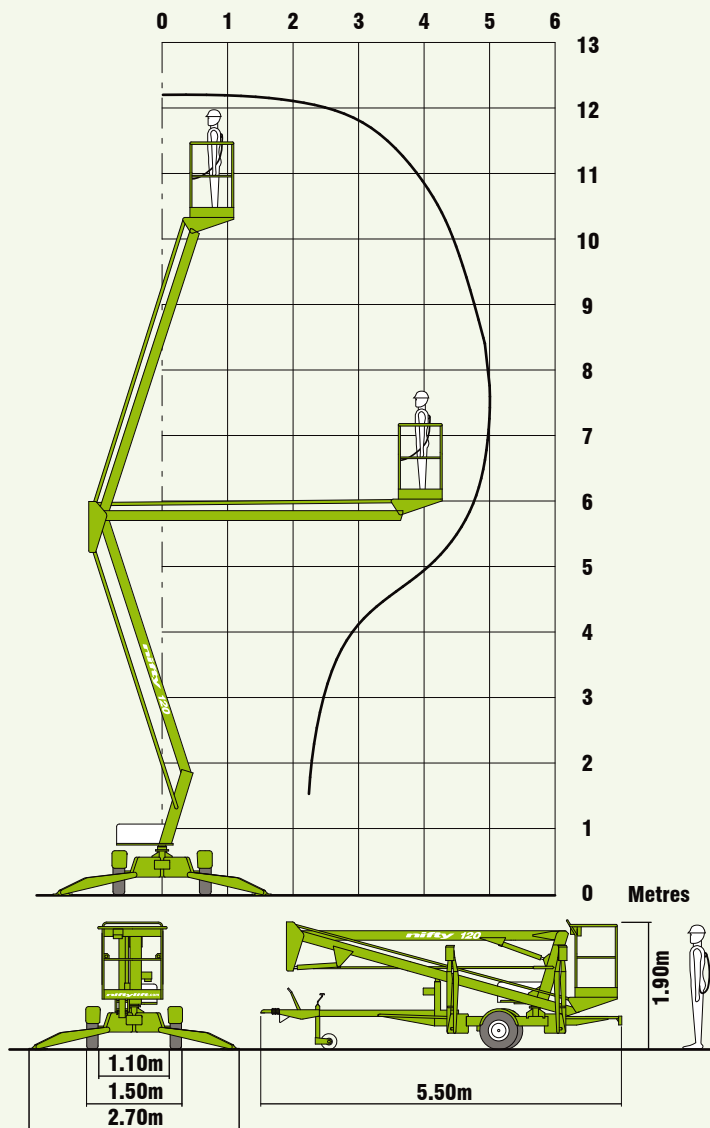

SPECIFICATIONS

| | | |
|---------------------------|---|-------------------|
| Working Height | 12.33m | 40ft 5in |
| Platform Height | 10.33m | 33ft 10in |
| Working Outreach | 5m | 16ft 5in |
| Slew | 360° | |
| Width- Travelling | 1.50m | 4ft 11in |
| - Working | 2.70m | 8ft 10in |
| - Axles Retracted* | 1.10m | 3ft 7in |
| Height | 1.90m | 6ft 3in |
| Length | 5.50m | 18ft |
| Weight | 1,160kg** | 2,560lbs* |
| Platform Capacity | 200kg | 440lbs |
| Platform Size | 1.10m x 0.65m | 3ft 7in x 2ft 2in |
| Control System | Fully Proportional Hydraulic | |
| Power System | Mains Only Battery Only Petrol or Diesel Only Bi-Energy (Engine & Battery) | |
| Drive Options | Traction Drive | |

* Traction drive axles do not retract.

** Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com

e-mail: info@niftylift.com
Tel.: +44 (0) 1908 223456
Fax.: +44 (0) 1908 312733

